

B150 Bare Shaft Self-Priming Centrifugal Pump Max. 330 m³/hour, Max. 32 mwc



Pump specifications:

Type.....	B150 BVGS
Max. flow	330 m ³ / hour
Max. head	32 mwc
Connections.....	DN150 (6")
Free passage.....	40 mm
Impeller type	Half-open impeller
Required power	35 kW
Pump speed	1500 rpm
Assembly	Bare shaft
Weight (net)	310 kg

FEATURES

B self-priming centrifugal pump

The B range of pumps have been designed with a clear focus on reliability, efficiency and durability, ranging from 1-1/2" to 12". Featuring an open impeller configuration in combination with a changeable wear plate, facilitating servicing and minimising costs of spares. All B series pumps are fitted with a non return valve in the suction port, eliminating the need for a foot valve in suction line and allowing quick priming.

Design features

- Basic, reliable technology
- Large solids handling capacity
- Suitable for use with hot fluids
- Wet self-priming
- Cooled shaft seal
- Extended life due to pump design

Fields of application


- Shipping
- Industry
- Construction
- Waste water management
- Emergency pump units
- Irrigation
- Agriculture
- Horticulture

Complete package designed & built by BBA Pumps

- Complete in-house design & production
- Over 60 years of experience in the market
- Extensive testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available

After sales service & product support

- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing
- Extensive training options available (technical & commercial), on-site or in-house

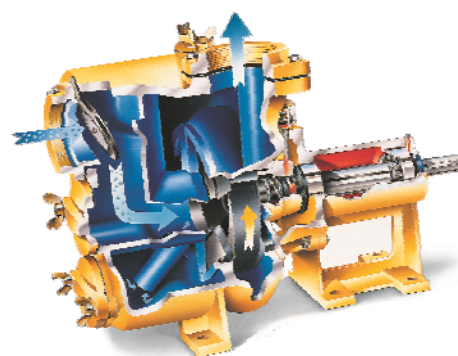

PERFORMANCE CURVES (1500 RPM)

Continuous duty according ISO 9906

